

TLT260AT

Packed with industry leading technology, the new released TLT260AT Hydraulic 2-post Lift combines the top-notch materials, outstanding lifting performance and 6000KG large capacities. All these features make TLT260AT a fantastic purchase for automotive repair shops and services.



FEATURES

- Easy to operate, fully automatic to rise, fall and manual lock.
- Safe to use by setting top limit switch, to prevent overhead collision.
- Double hydraulic cylinders drive, stable lifting and lowering.
- Adopt two steel cables for equalization, force two carriages to move synchronously, and effectively prevent the vehicle from tilting.
- Lowest height of lifting pad is 110mm.
- Passed 115% dynamic loading test and 150% static loading test.



SPECIFICATION

WORKING TEMPERATURE	-5°C~+40°C
RELATIVE HUMIDITY	Temperature +30°C, relative humidity 80%
TRANSPORT/STORAGE TEMPERATURE	-5°C~+40°C
HEIGHT ABOVE SEA LEVEL	No more than 2000m
ARM	3350mm
MOTOR POWER	3kW
MOTOR(OPTIONAL) VOLTAGE	According to client's requirement
SINGLE PHASE	220V/50Hz; 220V/60Hz
THREE PHASE	380V/50Hz
WORKING NOISE	75dB(A)
WORKING OIL PRESSURE	24MPa

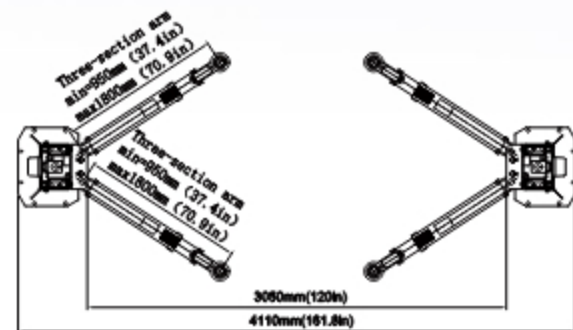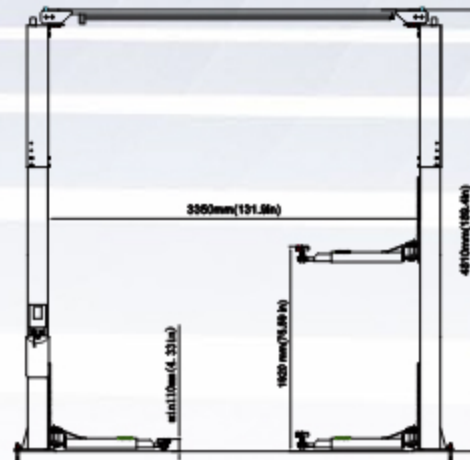

TWO TYPES COMPARISON

MODELS	RATED LOAD	LIFTING HEIGHT	RISE TIME	DESCENDING TIME	NET WEIGHT	PASSING WIDTH	MACHINE WIDTH	MACHINE HEIGHT
TLT260AT (Symmetric)	6000kg	1920mm	65s	20s	1160kg	3050mm	4110mm	4810mm
TLT260AT (Asymmetric)				40s		2888mm	4130mm	